




Kubota

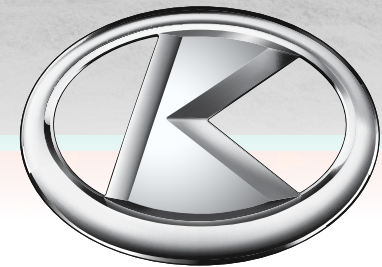

Kubota

Kubota

CONTACT US

- 3-5 Ibis Avenue, Ibis Acres, **San Juan**
- 21 Scott Street, **San Fernando**
- 1 O'Meara Road, **Arima**

868 731-7522 | 868 316-3022

www.ftfarfan.com

FT Farfan Ltd.

FT FARFAN
APPROPRIATE
TECHNOLOGY
LIMITED

TRACTORS
CATALOGUE

Куботы L3200DT



Куботы MX5100DT



Куботы M9540DT



MODEL		L3200DT 4WD	
ENGINE			
Type		Indirect injection, vertical, water-cooled 4-cycle diesel	
Engine gross power	HP (kW)	31.9 (23.8)	
Engine net power	HP (kW)	30.4 (22.7)	
PTO power	HP (kW)	26.7 (19.9)	
No. of cylinders		3	
Bore & stroke	mm		
Total displacement		1.499	
Ground PTO	rpm	2800	
Battery		12V, RC: 123 min, CCA: 490 A	
Fuel tank capacity		38	
PTO			
PTO / Engine speed	rpm	540 / 2430	
HYDRAULIC			
Lift control type		Position control	
Pump capacity (main)	ℓ(us gal)	24.7	
3-point hitch		Category I	
Lift capacity at lift points	kg	906	
TRAVELLING SYSTEM			
Transmission		8 forward and 4 reverse, sliding gear and constant mesh	
Steering		Integral type power steering	
Brake		Wet Disc type	
Clutch		Dry type single stage	
TYRE SIZE			
AG Standard	Front / Rear	7-16 / 11.2-24	
Turf Option	Front / Rear	25 x 8.50 - 14 / 13.6-16	
TRAVELING SPEED (with Standard Ag. Tyres)			
	km/h	Forward (1.8 - 22.0) Reverse (2.4 - 7.9)	
DIMENSIONS			
3-point hitch	mm	2800	
Overall width (min. tread)	mm	1400	
Overall height (w/ROPS)	mm	2330	
Wheelbase	mm	1610	
Min. turning radius (w/brake)		2.5	
WEIGHT (with ROPS)			
	kg	1180	

MODEL		MX5100DT 4WD	
ENGINE			
Type		E-TVCS, Indirect injection, liquid cooled diesel	
Engine gross power	HP (kW)	52.2 (38.9)	
PTO power	HP (kW)	44.0 (32.8)	
No. of cylinders		4	
Total displacement	cu. in. (cc)	148.6 (2434)	
Fuel tank capacity	gal. (ℓ)	12.7 (48)	
Air cleaner		Dry-dual element	
Alternator	Amp	45	
TRANSMISSION			
No. of speeds		8F/8R	
Main gear shift (4 speeds)		Partially synchronized (3rd & 4th)	
Shuttle		Synchronized	
Main clutch		Dry single plate	
Brake		Mechanical wet disc	
Differential lock		Rear standard (mechanical)	
PTO			
PTO type		Live independent, hydraulic PTO with PTO brake, wet clutch	
Speed		540 rpm	
HYDRAULIC			
Pump capacity (main)	gpm (ℓ/min.)	9.5 (35.8)	
Power steering	gpm (ℓ/min.)	4.9 (18.6)	
3-point hitch		Category I & II	
Control system		Position (std), Draft (opt)	
Lift capacity at 24 in. behind lift point	lbs.(kg)	2310 (1050)	
TYRE			
AG Standard	Front / Rear	9.5-16 / 14.9-26	
Turf Option	Front / Rear	29 x 12.5 - 15 / 44 x 18-20	
TRAVELING SPEED (with Standard Ag. Tyres)			
	mph (km/h)	Forward	Reverse
		1.0 (1.6) 16.0 (25.9)	0.9 (1.5) 14.7 (23.7)
WEIGHT (with ROPS)			
Overall length (w/o 3P)	2WD in. (mm)	122.8 (3120)	
Overall height (top of ROPS)	in. (mm)	95.7 (2430)	
Overall width (Minimum)	in. (mm)	69.7 (1770)	
Wheelbase	in. (mm)	74.6 (1895)	
Min. ground clearance	4WD in. (mm)	95.7 (2430)	
Turning radius (w/ brake)	4WD ft. (m)	8.9 (2.7)	
Tractor weight	4WD lbs. (kg)	3620 (1642)	

MODEL		M9540DT 4WD	
ENGINE			
Type		E-CDIS, Direct Injection	
No. of cylinders	HP (kW)	4 / Turbocharged	
Engine net power	HP (kW)	95 (70.9)	
PTO power	HP (kW)	84 (62.7)	
Total displacement		230 (3769)	
Engine rpm	mm	2600	
Fuel tank capacity		23.8 (90) on ROPS model	
Alternator	rpm	45 Amp on	
TRANSMISSION			
No. of speeds		F8 / R8	
Main gear shift		Fully synchronized (4 speed)	
Shuttle shift		Synchro-shuttle	
Main clutch type		Dry single plate	
Main clutch material / diameter	in. (mm)	Cerametallc 12.8 (325)	
Brake type		Hydraulic wet disc	
Different lock (Front / Rear)		~/ Mechanical	
4WD clutch type		Mechanical	
PTO			
Type	rpm	540	
HYDRAULIC			
Pump capacity (3-point Hitch)	gpm(ℓ/min.)	17.0 (64.3)	
3-point Hitch		Telescopic lower link ends, telescopic stabilizers	
Category		II	
Control system		Position, draft (top link sensing) & mixed control	
Lift capacity at lift points	lbs. (kg)	7275 (3300)	
Cylinder type		Two external cylinders	
No. of standard remote valves		1	
STANDARD TYRE SIZE			
4-WD Front / Rear		18.4 - 30 R1 / 11.2-24	
DIMENSIONS & WEIGHT			
Overall length ROPS model	in. (mm)	14.0 (3760)	
Overall height Top of ROPS	in. (mm)	98.0 (2490)	
Wheelbase	in. (mm)	88.6 (2250)	
Crop clearance (Front axle)	in. (mm)	500	
Turning radius (w/o brake)	ft. (m)	13.8 (4.2)	
Tractor weight ROPS model	lbs. (kg)	5510 (2500)	